


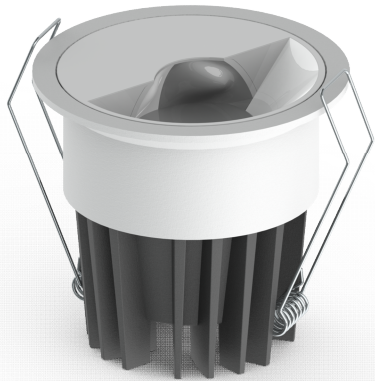



Fino WW

Spots with Trim

Housing Colors  

CCT – 3000K/4000K/5700K/6500K


Dimensional Drawing



Features

- Thermally proven die casted heat sink to maintain COB temperature within limit.
- Asymmetric trim for wall washer options
- Smooth scalloping design on wall
- No visible screws design
- Easily replaceable trims
- Detachable driver for easy servicing and replacement of driver
- Aluminum powder coating finishes.
- Minimum lip size ~ 6mm
- DALI/Analog Dimming compatibility
- 90CRI option

Beam Angles



Asymmetric



SELV



Variants

Order Code	Product Size (Dia. X H)	Ceiling Cutout	Wattage	System Lumen	CCT & CRI	Beam Angle	Color
SL03-RC2W-0640-WBAZ	Ø85 X 74mm (Asymmetric Trim)	75 mm	6W	300 Lm	4000K & 80CRI	36°	White Ring + Black Heatsink
SL03-RC2W-0940-WBAZ	Ø85 X 74mm (Asymmetric Trim)	75 mm	9W	450 Lm	4000K & 80CRI	36°	White Ring + Black Heatsink
SL03-RC2W-1240-WBAZ	Ø85 X 74mm (Asymmetric Trim)	75 mm	12W	600 Lm	4000K & 80CRI	36°	White Ring + Black Heatsink
For customization in CCT, CRI, Wattage, Color, Optics, Dimming, Tuning please consult before ordering.							

Technical Specs

SN	Technical Parameters	Values
1	Lumen Efficacy	50 Lm/W +/- 5%
2	Illumination	100 % Down
3	Operating Ambient Temperature	0-45 °C
4	Operating Frequency	50 Hz ± 3%
5	Rated Voltage	240 V
6	Input Voltage Range	150 V – 270 V
7	IP rating	IP20
8	Construction Details	Die Casted Heat sink and Ring SS Spring Clamp
9	Diffuser/Optical material	Highly efficient Reflector with assymetric trim for wall wash
10	Light Source	LED
11	LED Manufacturer	Bridgelux
12	Colour Temperature (K) CCT	3000K, 4000K, 5700K, 6500K
13	Standard Deviation Colour Matching (SDCM)	3 SDCM
14	LED life with L70 criteria	50,000 Hrs.
15	Color Rendering Index	CRI > 80
16	Unified Glare Rating	UGR < 19
17	Driver Efficiency	>85%
18	Surge Protection (kV)	3 kV
19	PF @ Full Load & Rated Voltage	>0.95
20	THD @ Full Load & Rated Voltage	< 5 %
21	LED CCT Binning	ANSI Bin C78.377A
22	LED Photo biological safety report	IEC 62471
23	Electrical Insulation Class	Class I

For Specifiers :

Clove Make – FINO WW recessed spot light, Ø85XH74mm, 12W, 80CRI, 4000K CCT, wall washer beam angle, chrome trim, black powder coated. Total Lumen 600 lux, 3 SDCM LED binning, ON-OFF switchable driver with constant current type, THD<5%, Efficiency>85%, PF>0.95. Aluminum die cast housing, and with all accessories for installation.

Ceiling Cutout – Ø75mm